RG1602A-IIC(P) Display Blue With I2C (PCF8574T)

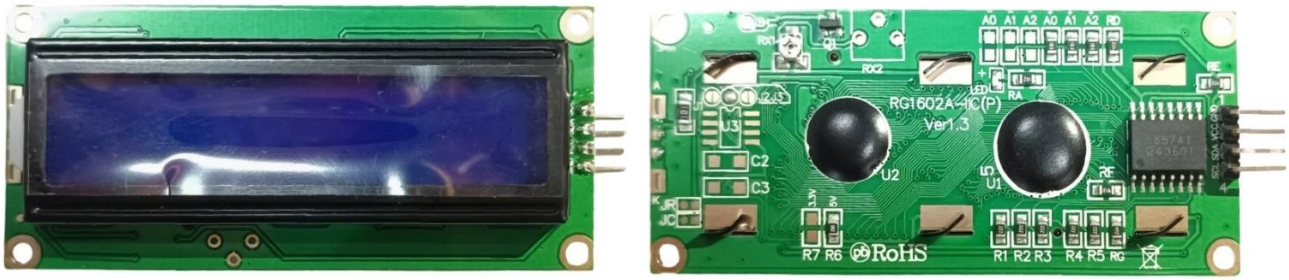

Features:

- LCD Display Type: STN (BLUE)
- Polarzier Mode: Transmissive, Negative
- Drive Method: 1/16 Duty, 1/4 Bias
- Viewing Direction: 6:00 0' CLOCK
- Logic Supply Voltage: 5.0V
- LCD Driving Voltage: 5.0V
- Operating Temp: -20 TO 70°C
- Storage Temp: -30 TO 80°C
- Control IC: PCF8574+ST7066U
- Backlight Type: WHITE, 5.0V±0.2V 20mA
- Connector: PIN
- Ulteriorly Tolerance: ±0.2MM
- RoHS

Outline Dimensions:

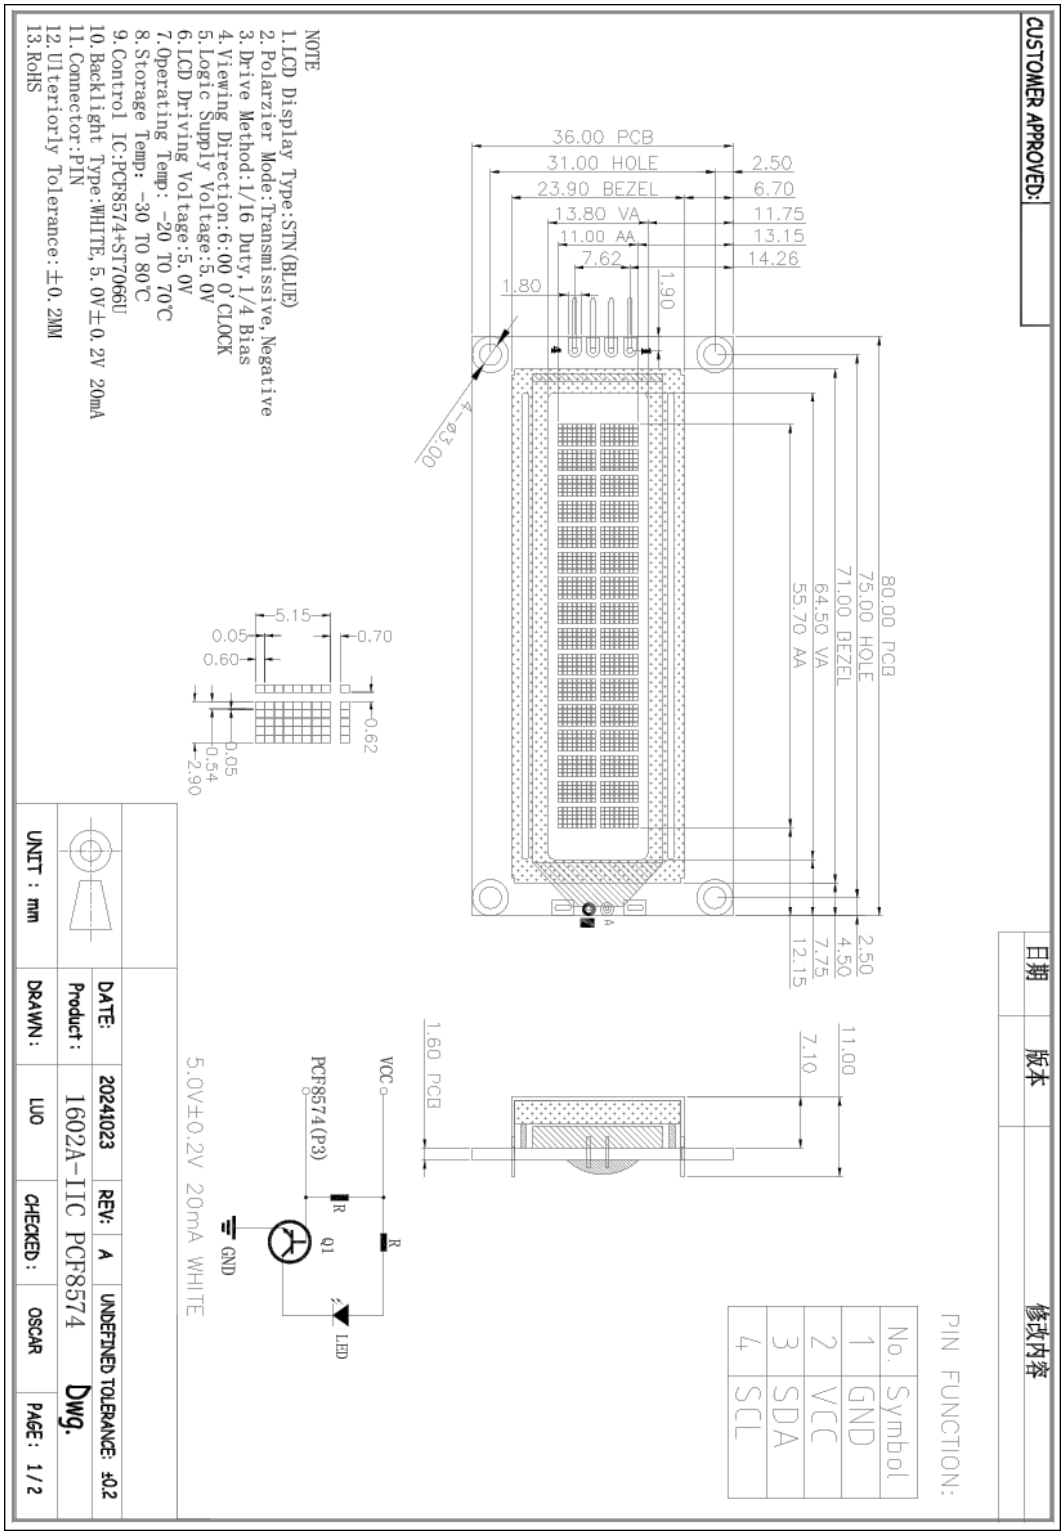

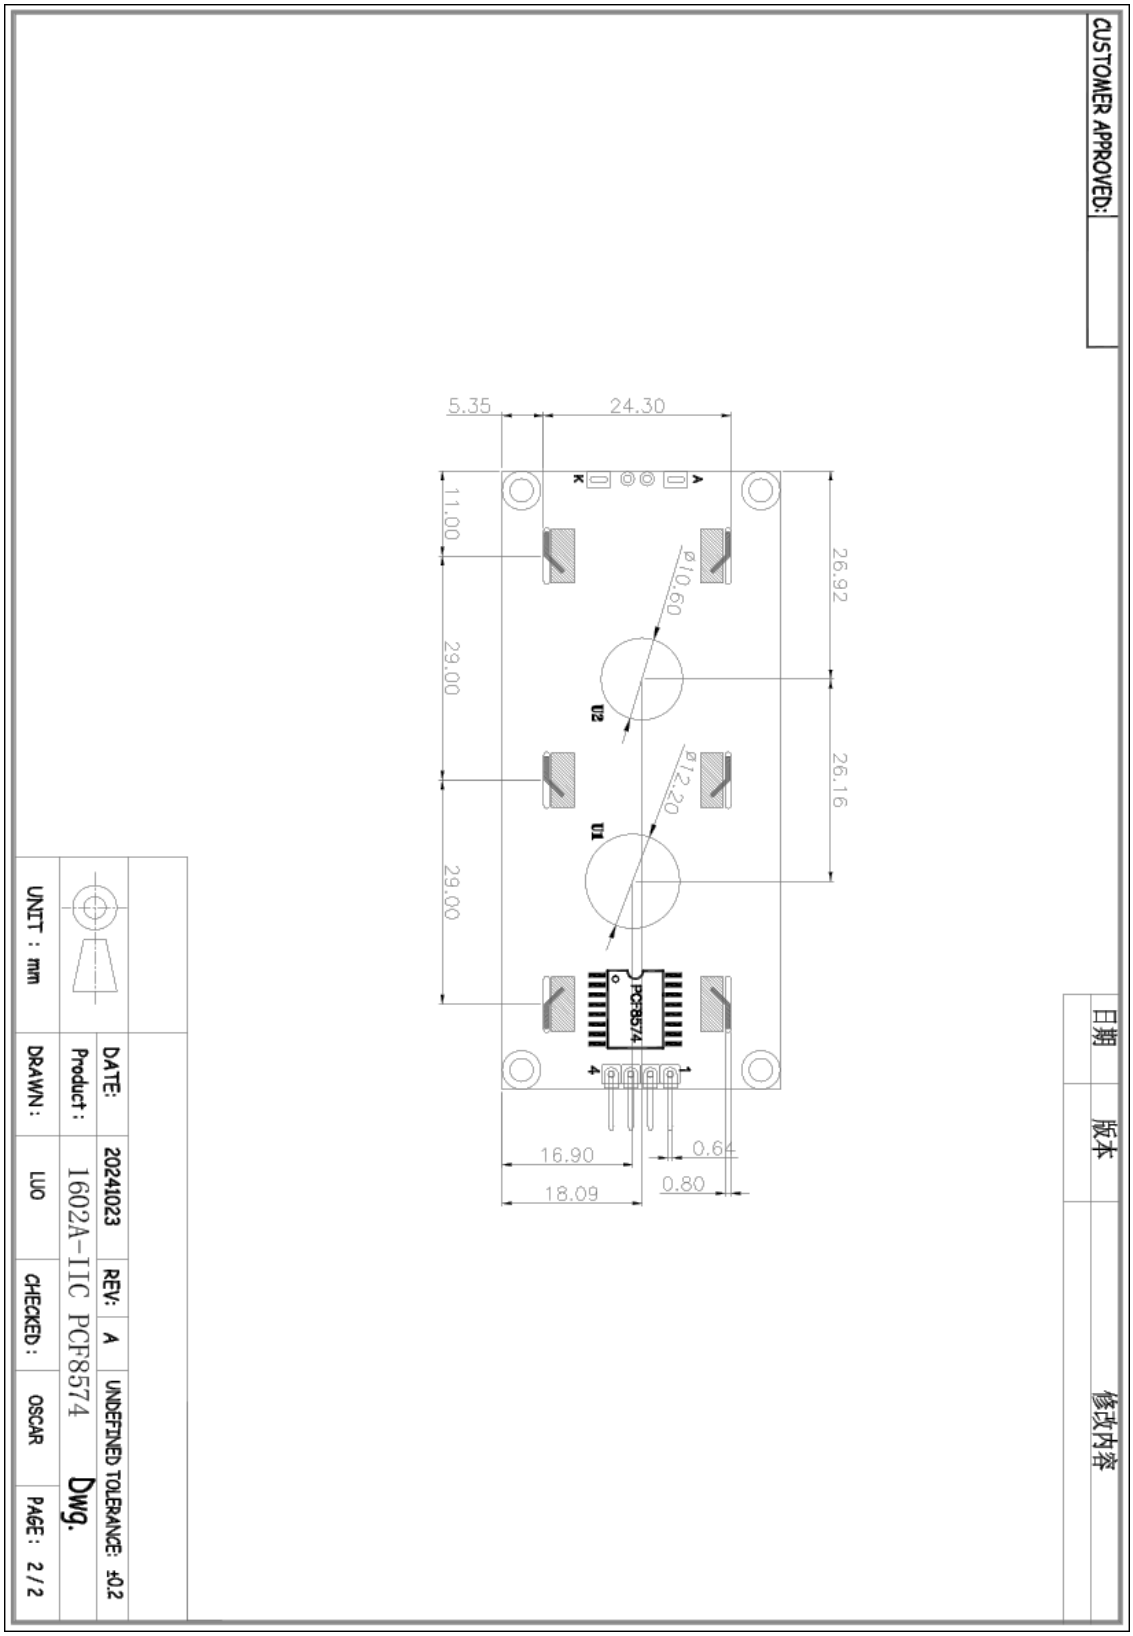
CUSTOMER APPROVED:
5.35
24.30
11.00
29.00
29.00
26.92
26.16
Ø10.60
Ø12.20
U2
U1
PCF8574
A
K
1
4
16.90
18.09
0.64
0.80
日期
版本
修改内容
DATE: 20241023
REV: A
UNDEFINED TOLERANCE: ±0.2
Product : 1602A-IIC PCF8574 Dwg.
DRAWN : LUO
CHECKED : OSCAR
PAGE : 2/2
UNIT : mm