


Product Overview

- Thread: PG, Metric and NPT thread
- Material: UL approved Nylon PA6 , (Flammability) UL 94V-2 For Cap, Body and Nut
Body washer and Nut washer are made from TPE rubber Flammability UL94V0
- Protection Degree: IP 67
- Working temperature: -40°C to 105°C
- Standard: IEC60695 2-11, IEC62444, RoHS, CE
- Features: The Claws and seals of excellent design, sealing nut have a “click” sound and re-open, can hold cable firmly and have a wider cable range. Resistance to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours: Black(RAL9005), gray(RAL7035), other color available upon request.

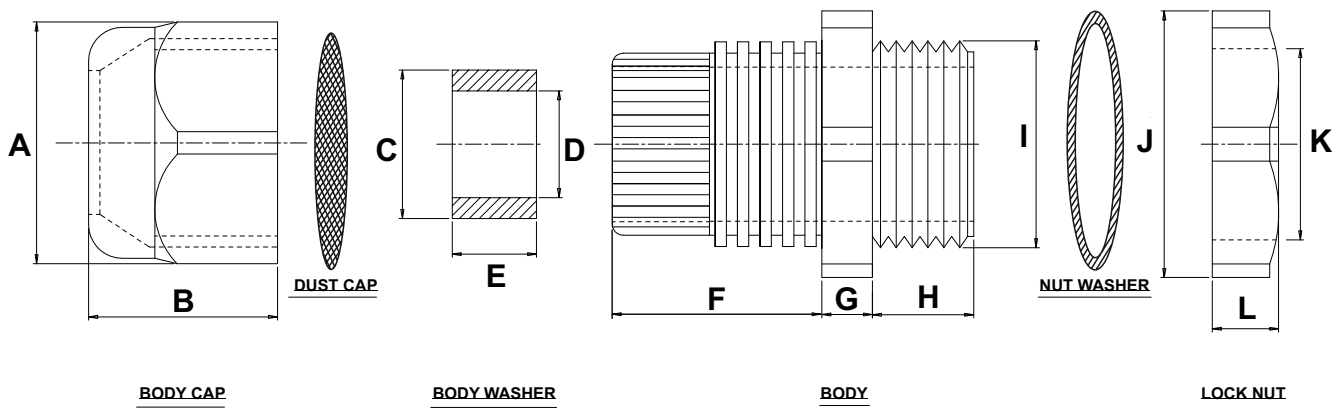

Characteristics

SIZE	PART NO.	A	B	C	D	E	F	G	H	I	J	K	L	CABLE SIZE
PG 7	PC01P072G-BNP-DC	17.30	13.20	9	6.40	9.10	14.35	4.90	10.50	12.20	18.70	11.30	5.70	3.5~5.5
PG 9	PC01P092G-BNP-DC	21.50	17.20	11	7.50	11.60	17.50	4.90	10.60	14.75	24	13.80	5.70	4.00~8.00
PG 11	PC01P112G-BNP-DC	21.70	16.80	14	10.40	8.20	17.80	4.50	8.80	18.40	24	17.50	6	5.50~9.50
PG13,5	PC01P132G-BNP-DC	23.70	18	17.20	13.50	8.40	19.50	5.10	9	20.50	25.70	19.40	6	7.00~11.50
PG 16	PC01P162G-BNP-DC	26	19.80	16.50	12.90	8.50	21	5.40	10	22	30	21.20	5.50	9.00~13.00
PG 19	PC01P192G-BNP-DC	26.50	20	19.50	15.50	8	21.50	5.50	10	24	30	22.80	6	11.00~15.00
PG 21	PC01P212G-BNP-DC	32.80	22	23.5	19.5	11.50	26	6.10	10	28	36	27	5.70	9.00~19.50
PG 25	PC01P252G-BNP-DC	35	20.40	24.50	17.50	11.50	23	6	11	29.5	36	28.90	6.20	12.00~21.00
PG 29	PC01P292G-BNP-DC	42	26	30	26	14	29.50	6.50	12	37	46.50	36	7	18.00~25.00
PG 36	PC01P362G-BNP-DC	52	29.50	40.0	34	15.50	30.50	7.50	14	46.80	57	45.50	7.50	20.5~32.00
PG 48	PC01P482G-BNP-DC	65	31	50	44	16	35	8	14	58.50	70	58	7.50	29.50~44.00