

SHRINKING BODY

缩体晶


- 4Φ~10Φ, 105°C Guarantee of life 2,000Hrs
- 4Φ~10Φ, 105°C 2,000Hrs 寿命保证
- Smaller size than FVH series
- 比FVH 系列小尺寸产品
- High Density PCB design for surface adhesion
- 适用表面粘着之高密度PCB设计
- RoHS compliance
- 符合RoHS指令



Specifications 特性表

Items 项目	Characteristics 主要特性								
Operation Temperature Range 使用温度范围	-55℃~105℃								
Voltage Range 额定电压范围	6.3~50V								
Capacitance Range 额定容量范围	10~1500								
Capacitance Tolerance 额定容量容许误差值	±20% at 120Hz, 20℃								
Leakage Current 漏电流				C=额定静电容量(μF微法拉 V=额定直流工作电压 (V/伏特)					
	测定电压		6.3~50V						
	测试时间		2分钟后						
	漏电流		I=0.01CV或3 μA,取最大值						
Dissipation Factor (Tan δ)损失角	Rated Voltage 额定电压 (V)			6.3	10	16	25	35	50
	Tan δ (max) 损失角最大值	Φ4~Φ10		0.30	0.24	0.20	0.18	0.16	0.14
		Φ12.5~Φ16		0.35	0.28	0.24	0.20	0.18	0.16
	When the capacitance exceeds 1,000 μF,0.02 shall be added every 1,000 μF increase. 当额定静电容量大于 1,000 微法拉时, 每增加 1,000 微法拉需加 0.02.								
Stability at Low Temperature 低温特性 (at 120Hz)	Impedance ratio shall not exceed the values given in the table below阻抗比不可大于下表所列数值								
	Rated Voltge 额定工作电压			6.3	10	16	25	35	50
	Impedance ratio 阻抗比 ZT/Z20 (max)	Z (-25℃) /Z (20℃)	ΦD<12.5	4	4	3	2	2	2
			ΦD≥12.5	5	4	3	2	2	2
		Z (-55℃) /Z (20℃)	ΦD<12.5	12	8	6	4	3	3
			ΦD≥12.5	10	8	6	4	3	3
Endurance 耐久性	保证寿命时间			Φ4~Φ5: 1, 000小时 ΦD6.3*7.7~10: 2, 000小时					
	Capacitance Change 静电容量变化率			ΦD≤6.3mm: ≤初始值的±25% ΦD≥8mm: ≤初始值的±20%					
	Tan δ 损失角			ΦD≤6.3mm: ≤初始值的300% ΦD≥8mm: ≤初始值的200%					
	Leakage Current漏电流			Within specified value ≤初始规格值					
Shelf Life 高温储存特性	保证寿命时间: 1000小时, 其它测试项目同耐久性.								
Coefficient of correction 纹波电流与频率补正系数									
	频率 (Hz)			50	120	1K	10K≤		
	静电容量(μF) ≤1, 000			0.80	1.00	1.25	1.40		
	1, 000<静电容量≤8, 200			0.85	1.00	1.15	1.25		
Marking 标识	Black print on the case top. 铝壳顶部黑色印刷.								

DRAWING (unit: mm) 外形图

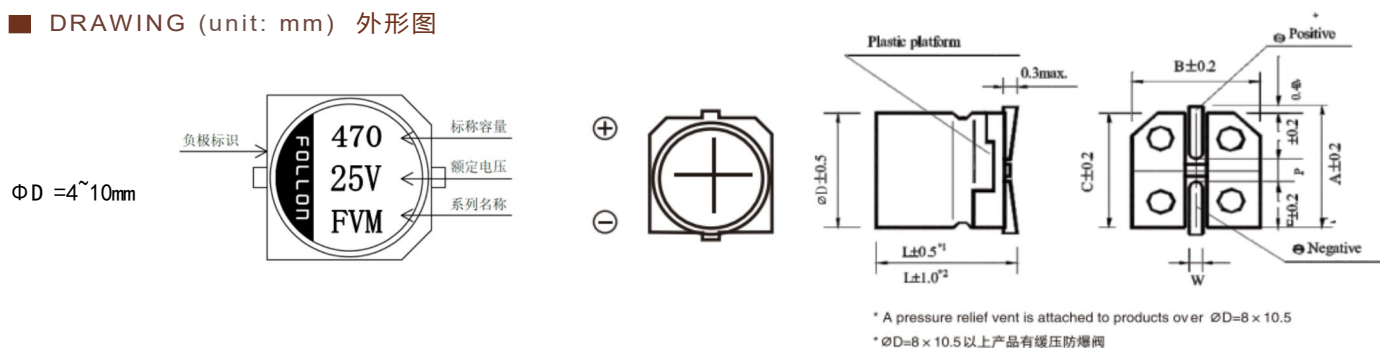

DIMENSIONS (Unit:mm)尺寸表

单位: mm

DXL	4X5.8	5X4.5/5.8	6.3X4/4.5	6.3X5.8/7.7	8X6.5	8X10.5	10X10.5
A	4.3	5.3	6.6	6.6	8.3	8.3	10.3
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3
C	5.1	6.0	7.2	7.2	9.2	9.2	11.2
P ± 0.2	1.0	1.5	2.0	2.0	2.3	3.1	4.6
L ± 0.2	5.8 ± 0.3	4.5/5.8 ± 0.3	4 ± 0.1 /4.5 ± 0.3	5.8/7.7 ± 0.3	6.5 ± 0.3	10.5 ± 0.5	10.5 ± 0.5

Specifications 标准品一览表

额定电压 VDC		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
静电容量 (uF)		Φ DXL	mA	Φ DXL	mA	Φ DXL	mA	Φ DXL	mA	Φ DXL	mA	Φ DXL	mA
10	100	4x5.8	19	4x5.8	19	4x5.8	19	4x5.8	16	4x5.8	18	4x5.8	20
22	220	4x5.8	23	4x5.8	20	4x5.8	25	5x5.8	32	5x4.5 5x5.8	26 32	5x5.8	32
33	330	4x5.8	30	4x5.8	22	4x5.8	35	5x5.8	35	5x5.8	35	6.3x5.8	48
47	470	4x5.8	35	5x5.8	38	4x5.8	38	5x5.8	40	6.3x5.8	48	6.3x7.7	68
56	560	4x5.8	38	5x5.8	40	5x5.8	40	5x5.8	40	6.3x5.8	48	8x6.5	86
68	680	4x5.8	42	5x5.8	42	5x5.8	42	6.3x5.8	48	6.3x5.8	48	8x6.5	92
100	101	5x5.8	54	5x5.8	60	5x5.8 6.3x4.5	60 55	6.3x5.8 8x6.5	80 90	6.3x5.8 8x6.5	80 90	8x6.5 6.3x7.7	100 92
220	221	5x5.8	90	6.3x4.5 6.3x5.8	60 90	6.3x5.8	90	6.3x7.7	120	8x10.5	190	8x10.5	190
270	271	6.3x5.8	105	6.3x5.8	105	6.3x7.7	120	6.3x7.7	130	8x10.5	190		
330	331	6.3x7.7	120	6.3x7.7	120	6.3x7.7	120	6.3x7.7	140	10x10.5	310		
470	471	6.3x7.7	140	6.3x7.7	140	6.3x7.7	140	8x10.5	310				
560	561	6.3x7.7	165	8x10.5	20	8x10.5	280	10x10.5	380				
680	681	6.3x7.7	345	8x10.5	280	10x10.5	310	10*10.5	380				
1000	102	8x10.5	330	10x10.5	380	10x10.5	380	10*10.5	380				
1500	152	10x10.5	380	10x10.5	380								

●Case size $\Phi D \times L$ (mm), Impedance (Ω) at 20°C, 100KHZ, ripple current (mA rms) at 105°C, 120Hz

●尺寸 $\Phi D \times L$ (mm), 阻抗值 (Ω) 于 20°C, 100KHZ 纹波电流 (mA rms) 于 105°C, 120Hz

□ The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 10°C rise. When long life performance is required in actual use, the ripple current has to be reduced.

铝电解电容器由于在纹波电流叠加时自我发热，温度上升而老化，每升温10°C 寿命减少一半，要想保持长寿命请在使用过程中降低纹波电流。

IMPORTANT NOTICE

注意

Jiangxi Follon Electronic Technology Co., Ltd. / Guangdong Follon Electronic Technology Co., Ltd. (FOLLON) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any products or services. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

江西富隆电子科技有限公司 / 广东富隆电子科技有限公司 (以下简称富隆) 保留对产品、服务、文档的任何修改、更正、提高、改善和其他改变, 或停止提供任何产品和服务的权利。客户在下单和生产前应确保所得到的信息是最新、最完整的。

FOLLON assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using FOLLON components.

富隆对相关应用的说明和协助以及客户产品的板级设计不承担任何责任。

FOLLON products are not authorized for use in safety-critical applications (such as life support devices or systems) where a failure of the FOLLON product would reasonably be expected to affect the safety or effectiveness of that devices or systems.

富隆的产品并未授权用于诸如生命维持设备等安全性极高的应用中。

The acknowledgement document provided by FOLLON sales personnel shall prevail. The information included herein is believed to be accurate and reliable. However, FOLLON assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

以富隆销售人员提供的承认书文档为准.本文中的相关信息是精确和可靠的,但富隆并不对其负责,也不对任何可能的专利和第三方权利的侵害负责。

If you have any questions, please contact our sales personnel.

如果您有任何疑问，请联系我们的销售人员。
